



## LED LAMPS

# ProLED<sup>®</sup> GU24 A19 Omnidirectional Series



Omnidirectional



Enclosed Rated



ENERGY STAR<sup>®</sup>

ProLED<sup>®</sup> GU24 Omnidirectional A-Shape Series lamps offer an economical and even more energy efficient alternative to non-dimmable compact fluorescent lamps



**Omnidirectional Optical Design Provides 230° Light Distribution**

**UL Listed for Damp Location & Enclosed Luminaires**

**ENERGY STAR<sup>®</sup> Certified**

**Backed by a 3-Year Warranty**

### **Applications:**

Home  
Education  
Hospitality  
Retail

### **Markets:**

Residential  
Commercial

**Halco**<sup>®</sup>  
LIGHTING TECHNOLOGIES

Contact Your Customer Care Specialist  
For Pricing, Orders And Technical Support.

800.677.3334 [www.halcolighting.com](http://www.halcolighting.com)


# ProLED®

## GU24 A19 Omnidirectional Series


Product #: \_\_\_\_\_ Type: \_\_\_\_\_  
 Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Comments: \_\_\_\_\_ Initials: \_\_\_\_\_

### Specifications

- Available in 2700K, 3000K, 4000K or 5000K CCT
- UL Listed for damp location and enclosed luminaires
- 230° degree beam angle creates uniform distribution of light
- 3-year warranty
- Rated for ICAT fixtures
- Non-Dimmable

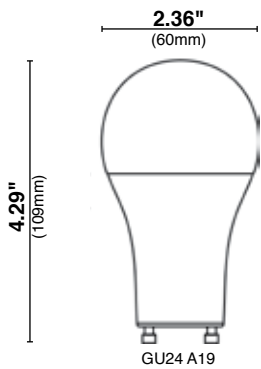

### Savings Comparison

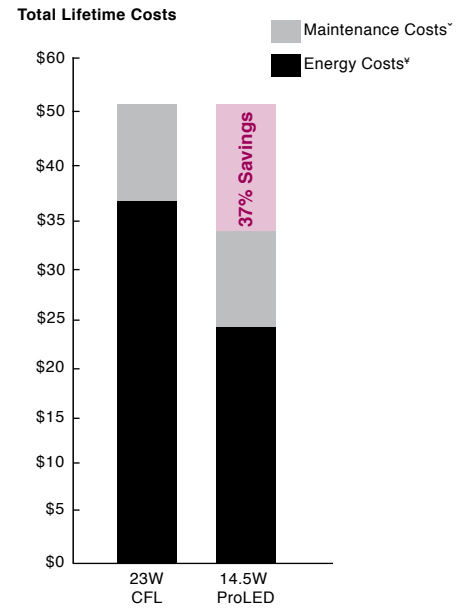

### Ordering Information



	Watts	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Angle	Pkg. Qty.	MOL	Equivalent CFL Wattage
⊕	9	GU24 Base	83080	A19FR9/827/OMNI/GU24/LED	120	2700K	82	800	15,000	230°	1/6	4.29"	13
⊕	9	GU24 Base	83081	A19FR9/830/OMNI/GU24/LED	120	3000K	82	800	15,000	230°	1/6	4.29"	13
⊕	9	GU24 Base	83082	A19FR9/840/OMNI/GU24/LED	120	4000K	82	800	15,000	230°	1/6	4.29"	13
⊕	9	GU24 Base	83083	A19FR9/850/OMNI/GU24/LED	120	5000K	82	800	15,000	230°	1/6	4.29"	13
⊕	11	GU24 Base	83084	A19FR11/827/OMNI/GU24/LED	120	2700K	82	1100	15,000	230°	1/6	4.29"	18
⊕	11	GU24 Base	83085	A19FR11/830/OMNI/GU24/LED	120	3000K	82	1100	15,000	230°	1/6	4.29"	18
⊕	11	GU24 Base	83086	A19FR11/840/OMNI/GU24/LED	120	4000K	82	1100	15,000	230°	1/6	4.29"	18
⊕	14.5	GU24 Base	83087	A19FR14/827/OMNI/GU24/LED	120	2700K	82	1600	15,000	230°	1/6	4.29"	23
⊕	14.5	GU24 Base	83088	A19FR14/830/OMNI/GU24/LED	120	3000K	82	1600	15,000	230°	1/6	4.29"	23
⊕	14.5	GU24 Base	83089	A19FR14/840/OMNI/GU24/LED	120	4000K	82	1600	15,000	230°	1/6	4.29"	23

⊕ NEW ITEM!

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Represents lamps that are ENERGY STAR® certified.

Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase.

25,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822 | halcolighting.com | Atlanta | Carlstadt | Cleveland | Houston | Los Angeles | Phoenix

© 2016 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change. 12-21-16. Re-order #9117